




MITSUBISHI
HEAVY INDUSTRIES, LTD.

MOTORES INTRABORDA
Motores mecánicos

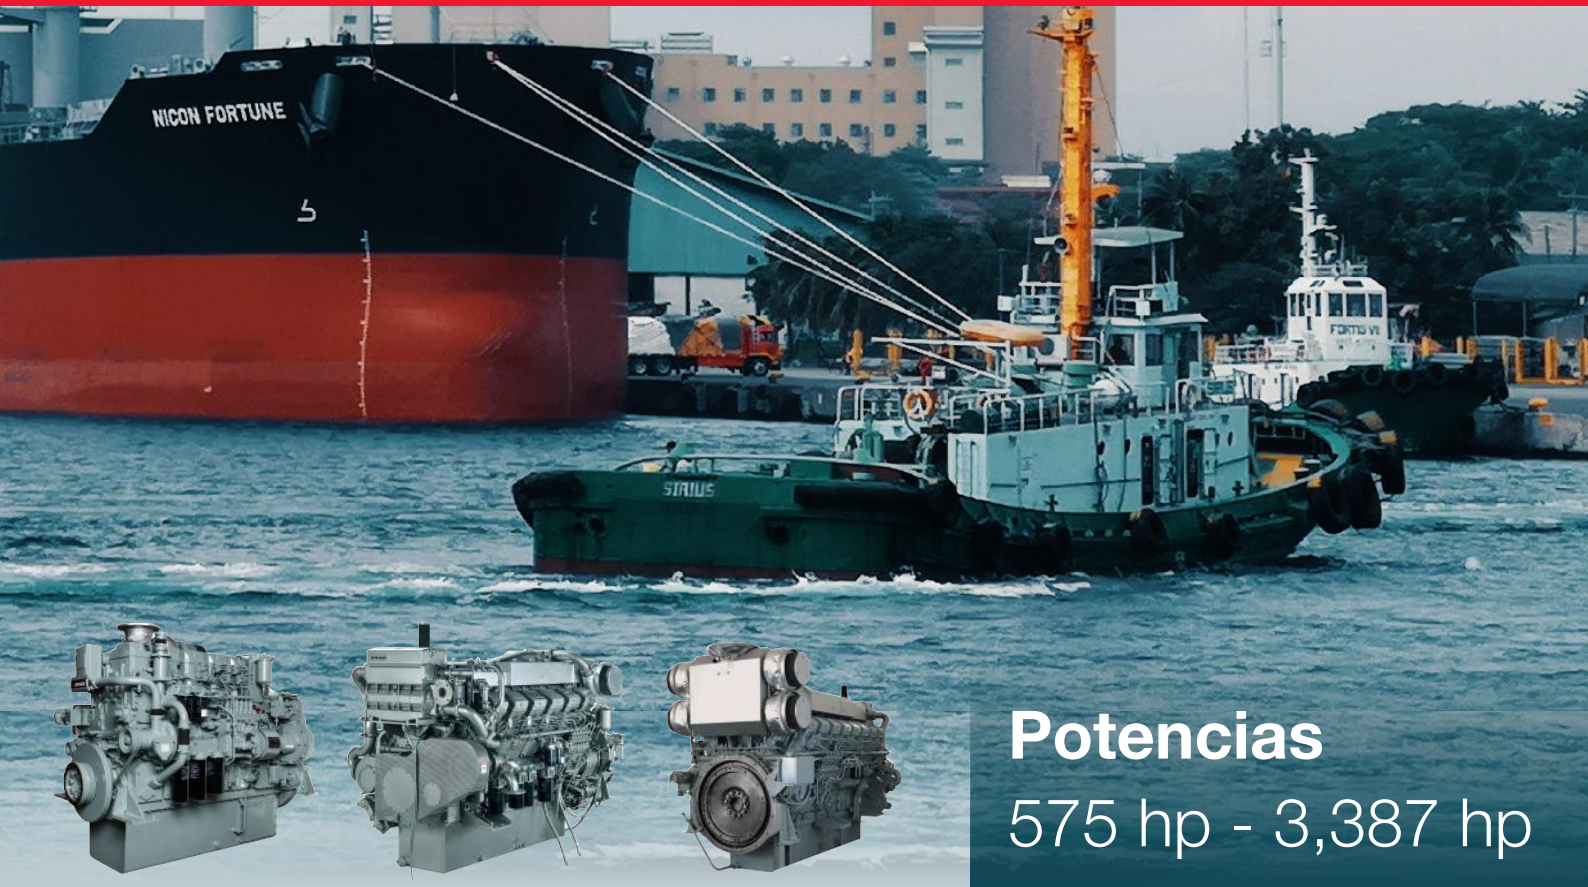

Potencias
575 hp - 3,387 hp

MODELO	RÉGIMEN						CILINDROS	CILINDRADA CC	CARACTERÍSTICAS	
	CONTINUO		PESADO		MEDIANO					
	KW / HP	RPM	KW / HP	RPM	KW / HP	RPM				
S6B3 MPTA	429 / 575	1940	-	-	-	-	6	14600	<ul style="list-style-type: none"> ■ Motores asistidos con actuador electrónico 	
S6A3 MPTA	483 / 648	1840	-	-	-	-	6	18600		
S6R MPTA	590 / 791	1600	-	-	-	-	6	24500		
S6R2 MPTA	597 / 801	1350	-	-	-	-	6	30000		
S12A2 MPTA	850 / 1140	1940	-	-	-	-	12	34000		
S12R MPTA	1180 / 11582	1600	-	-	-	-	12	49000		
S16R MPTA	1568 / 2103	1600	-	-	-	-	16	65000		
S6B3 T2MPTK	-	-	506 / 678	2001	600 / 805	2001	6	14600		<ul style="list-style-type: none"> ■ Motor marino para propulsión de Régimen continuo
S6A3 T2MPTK3	-	-	673 / 902	1900	748 / 1003	1900	6	18500		
S6R T2MPTK	630 / 845	1600	697 / 935	1650	811 / 1087	1800	6	24500		
S6R2 T2MPTK	643 / 862	1350	710 / 952	1400	818 / 1097	1500	6	30000		
S6R2 T2MPTK3	-	-	926 / 1242	1406	1017 / 1364	1406	6	30000		
S6R2 T2MPTK5	-	-	-	-	1117 / 1498	1406	6	30000		
S12A2 T2MPTK	940 / 1260	1800	1040 / 1395	1860	1150 / 1542	1920	12	34000		
S12R T2MPTK	1260 / 1690	1600	1394 / 1850	1650	1622 / 2175	1800	12	49000		
S16R T2MPTK	1676 / 2247	1600	1850 / 2481	1650	2158 / 2894	1800	16	65400		
S16R2 T2MPTAW	1943 / 2606	1350	2144 / 2875	1400	2526 / 3387	1500	16	79000		
S16R2 T2MPTK	1943 / 2606	1350	2144 / 2875	1400	2526 / 3387	1500	16	79000	<ul style="list-style-type: none"> ■ Tapas de inspección en el block ■ Bomba inyección lineal ■ Certificados por IMO, EU y Sociedades de clasificación (IACS) 	
S16R2 T2MPTK2	-	-	-	-	2808 / 3765	1500	16	79000		
S6B3 T2MPTK2	-	-	506 / 678	2001	600 / 805	2001	6	14600		
S6A3 T2MPTK	-	-	673 / 902	1900	748 / 1003	1900	6	18500		
S6R T2MPTK	630 / 845	1600	697 / 935	1650	811 / 1087	1800	6	24500		
S6R2 T2MPTK	643 / 862	1350	710 / 952	1400	818 / 1097	1500	6	30000		
S6R2 T2MPTK3L	-	-	926 / 1242	1406	1017 / 1364	1406	6	30000		
S12A2 T2MPTK	940 / 1260	1800	1040 / 1395	1860	1150 / 1542	1920	12	34000		
S12R T2MPTK	1260 / 1690	1600	1394 / 1850	1650	1622 / 2175	1800	12	49000		
S16R T2MPTK	1676 / 2247	1600	1850 / 2481	1650	2158 / 2894	1800	16	65400		
S16R2 T2MPTK	1943 / 2206	1350	2144 / 2875	1400	2526 / 3387	1500	16	78000	<ul style="list-style-type: none"> ■ Motores mecánicos ■ Culatas individuales 	