




ARTICULADAS TODO TERRENO

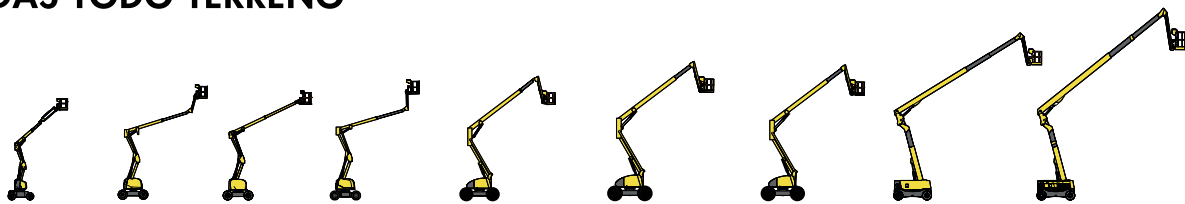

	HA120PX	HA 16 RTJ* HA 16 RTJO*	HA 16 RTJ PRO*	HA18PX	HA 20 RTJ* HA 20 RTJ PRO*	HA 26 RTJO* HA 26 RTJ PRO*	HA 32 RTJ PRO**	HA 41 RTJ PRO**
Altura de trabajo	12.4 m	16 m	16 m	17.2 m	20.6 m	26.4 m	31.8 m	41.5 m
Altura de plataforma	10.4 m	14 m	14 m	15.2 m	18.6 m	24.4 m	29.8 m	39.5 m
Alcance máximo	6.6 m	8.3 m	8.3 m	10.6 m	12.2 m	17.5 m	21.6 m	20.1 m
Punto de articulación	5.7 m	7.65 m	7.65 m	6.6 m	8.4 m	9.3 m	11.35 m	17.5 m
Capacidad máxima	230 Kg	230 Kg	230 Kg	230 Kg	230 Kg	250 Kg	250 Kg	230 Kg
Ancho	1.9 m	2.3 m	2.3 m	2.3 m	2.42 m	2.48 m	2.53 m	2.5 m
Altura replegada	2.2 m	2.3 m	2.3 m	2.3 m	2.51 m	2.97 m	2.8 m	2.99 m
Pendiente máxima	45%	40%	40%	50%	45%	45%	45%	40%
Motor	21 Kw - 28.5 hp	26.5 kw - 36 hp	26.5 kw - 36 hp	31 Kw - 42 hp	36.5 Kw - 49.6 hp	36.5 Kw - 49.6 hp	62.5 Kw - 84.9 hp	62.5 Kw - 84.9 hp
Peso total	5,620 Kg	6,200 Kg / 6,450 Kg	6,650 Kg	8,050 Kg	9,300 Kg / 9,600 Kg	15,500 Kg	20,100 Kg	23,900 Kg

* Los modelos seleccionados cuentan con:

ACTIV' SHIELD BAR 2.0: Previene los riesgos de atrapamiento

ACTIV' SCREEN: Herramienta de diagnóstico incorporada

** Estos modelos sólo cuentan con ACTIV' SHIELD BAR 2.0