




## PLATAFORMAS DE TIJERAS ELÉCTRICAS

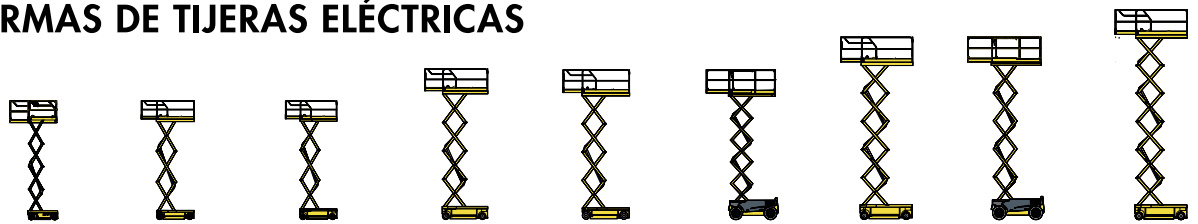

	Optimum 8	Compact 8	Compact 8 W	Compact 10N	Compact 10	Compact 10 RTE	Compact 12	Compact 12 RTE	Compact 14
Altura de trabajo	7.77 m	8.2 m	8.27 m	10 m	10.15 m	10.28 m	11.98 m	12.06 m	13.85 m
Altura de plataforma	5.77 m	6.2 m	6.27 m	8 m	8.15 m	8.28 m	9.98 m	10.06 m	11.85 m
Capacidad máxima	230 Kg	350 Kg	450 Kg	230 Kg	450 Kg	565 Kg	300 Kg	450 Kg	350 Kg
Dimensiones de la plataforma	2.59 x 0.74 m	3.23 x 0.81 m	3.23 x 1.2 m	3.23 x 0.81 m	3.23 x 1.2 m	3.7 x 1.45 m	3.23 x 1.2 m	3.7 x 1.45 m	3.23 x 1.2 m
Altura con barandillas replegada	1.98 m	2 m	2.14 m	2.18 m	2.26 m	2.44 m	2.39 m	2.56 m	2.5 m
Ancho	0.79 m	0.81 m	1.2 m	0.81 m	1.2 m	1.78 m	1.2 m	1.78 m	1.2 m
Largo transporte	1.9 m	2.49 m	2.49 m	2.49 m	2.49 m	2.64 m	2.49 m	2.64 m	2.49 m
Pendiente máxima	25%	23%	23%	23%	23%	25%	23%	25%	23%
Energía	24 V - 225 Ah	24 V - 225 Ah	24 V - 340 Ah	24 V - 225 Ah	24 V - 340 Ah	48 V - 255 Ah	24 V - 340 Ah	48 V - 255 Ah	24 V - 340 Ah
Peso total	1,520 Kg	1,655 Kg	2,030 Kg	2,190 Kg	2,330 Kg	3,305 Kg	2,470 Kg	3,675 Kg	3,175 Kg